



YHZ-GH-400W

www.yahualighting.com

Profile

400W

PC imported material high light guide lens, uniform luminescence without macula;

Profile + copper tube, rapid heat dissipation;

Series of mechanical wind resistance product design, hanging trial installation;

Beam angle: 45°/90°/120°

Light efficiency up to 130lm/W, high efficiency

Applicable occasions:



Suitable for supermarkets,

warehouses, factories, stadiums,


airports, etc.

CE RoHS

Model	YHZ-RG-400W
Input power	400W
Input voltage (V)	AC85-265V
HZ	50/60Hz
(A)	0.55A@ 220Vac
Power	≥0.95
Driver option	Meanwell/IP65/Isolated
Resistant to surges	4KV
Total harmonic distortion	<20%
Odd harmonic limits	IEC 61000-3-2 Class C
Startup time	≤0.5S (&230V)
Strobe	< 8%
LED	SMD3030
Brand	Philips 3030/Lumileds3030
Beam angle	45°/90°/120°
Color temperature	3000K/4000K/5000K/6000K
RA	Ra80
Color tolerance	≤7
IK Grade	IK10
IP Grade	IP65
Lm/W	120-130Lm/W
N.W(kg)	13
G.W(kg)	14
Product dimension	248*429mm
Packing details	Lamp head 300*300*380mm1PCS/CTN ; Reflector 440*440*400mm 10PCS/CTN

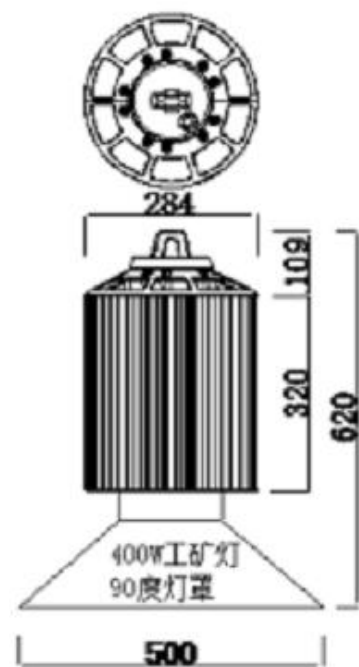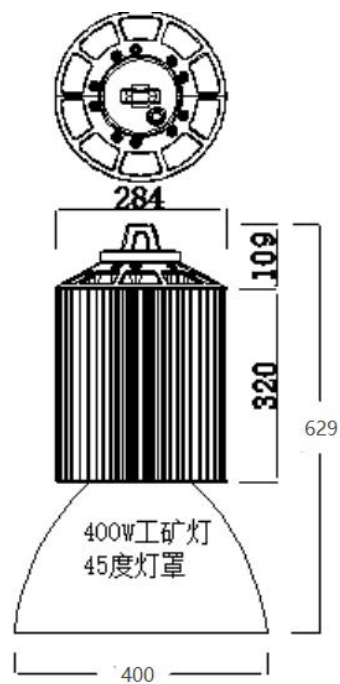

400W 90D

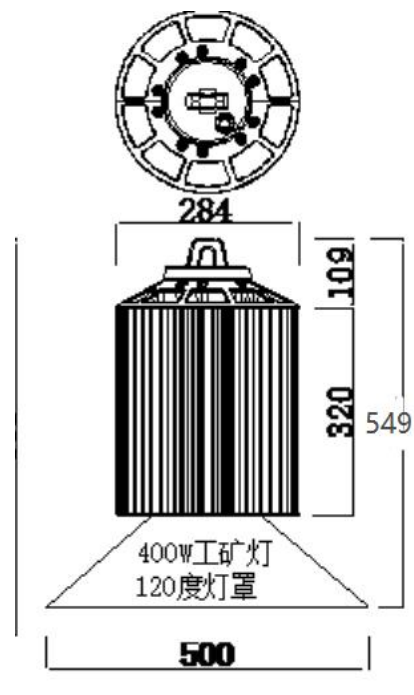

LED Bay Light

YHZ-GH-400W

